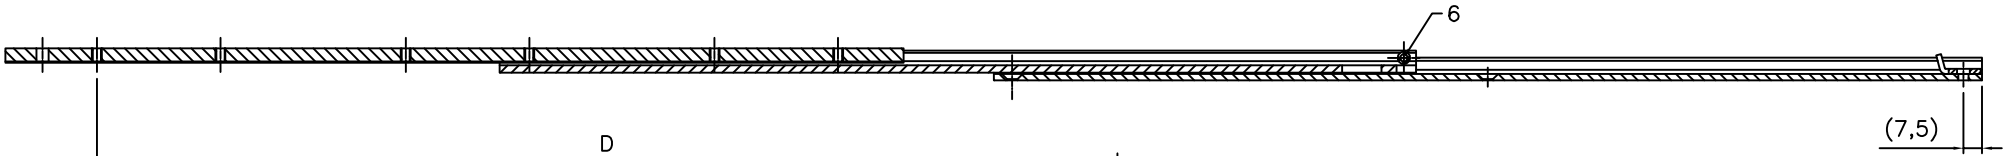

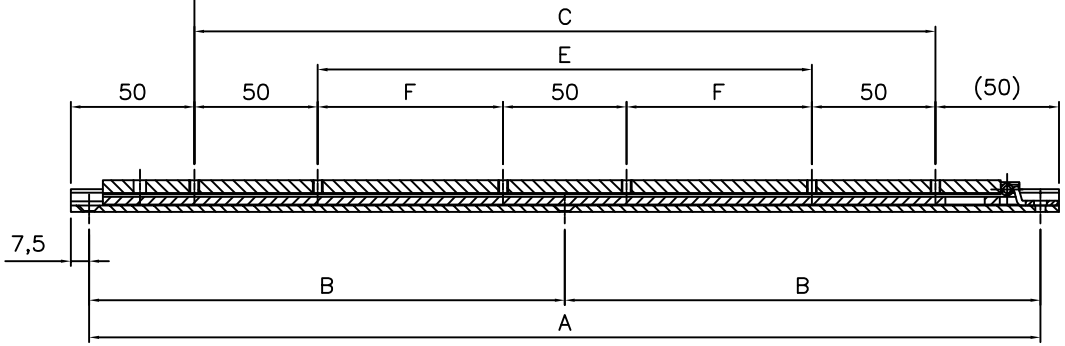

– PROFILE :

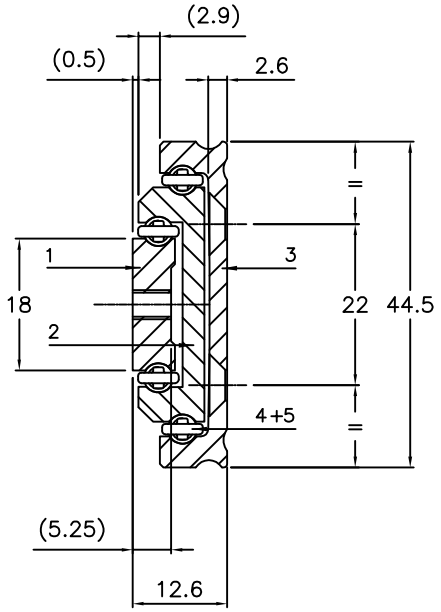

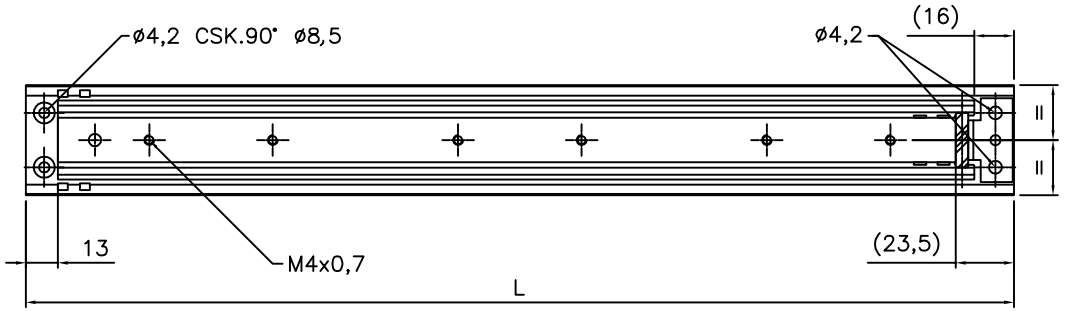

– MATERIAL :

1 – Inner beam	:	Steel
2 – Intermediate beam	:	Steel
3 – Outer beam	:	Steel
4 – Bearing ø4	:	Steel
5 – Ball retainer	:	Plastic
6 – End stop	:	Plastic

– SURFACE FINISH : Zinc plating

– WEIGHT : 2,9 Kg/m

– OPTIONS :
Different slide lengths, extension, surface finish, ø and holes centres to customer's requirement.

⚠ WE RECOMMEND USE ON THE MAJOR AXIS.
DO NOT DISMOUNT THE SLIDE !

Do not modify the slides !

– Results given according to our load testing protocol (www.chambrelan.com)

* Loads indicated for a pair of slides mounted on the major axis evenly distributed load.

– Dimensions in mm

RA44	Profile tolerance : iso 2768 c L	Machining tolerance: iso 2768 m K
FT 013 – STEEL		
10.10.2011		

CHAMBRELAN
www.chambrelan.com

L	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	1000	
A	185	235	285	335	385	435	485										
B								267.5	292.5	317.5	342.5	367.5	392.5	417.5	442.5	492.5	
C	100																
E		50	100	150	200	250	300										
F								150	175	200	225	250	275	300	325	375	
D	213	263	313	363	413	463	513	563	613	663	713	763	813	863	913	1013	
Load* (Kg)	80	83	80	78	75	73	70	65	60	55	50	45	40	35	30	20	
Deflexion (mm)	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	

In a constant effort of improvement, the compagny reserves the right to modify its products without notice. No contratual information.

www.telerail.ru telerail@ya.ru тел. 8 (499) 703-39-77